


FIG.1 PRIOR ART

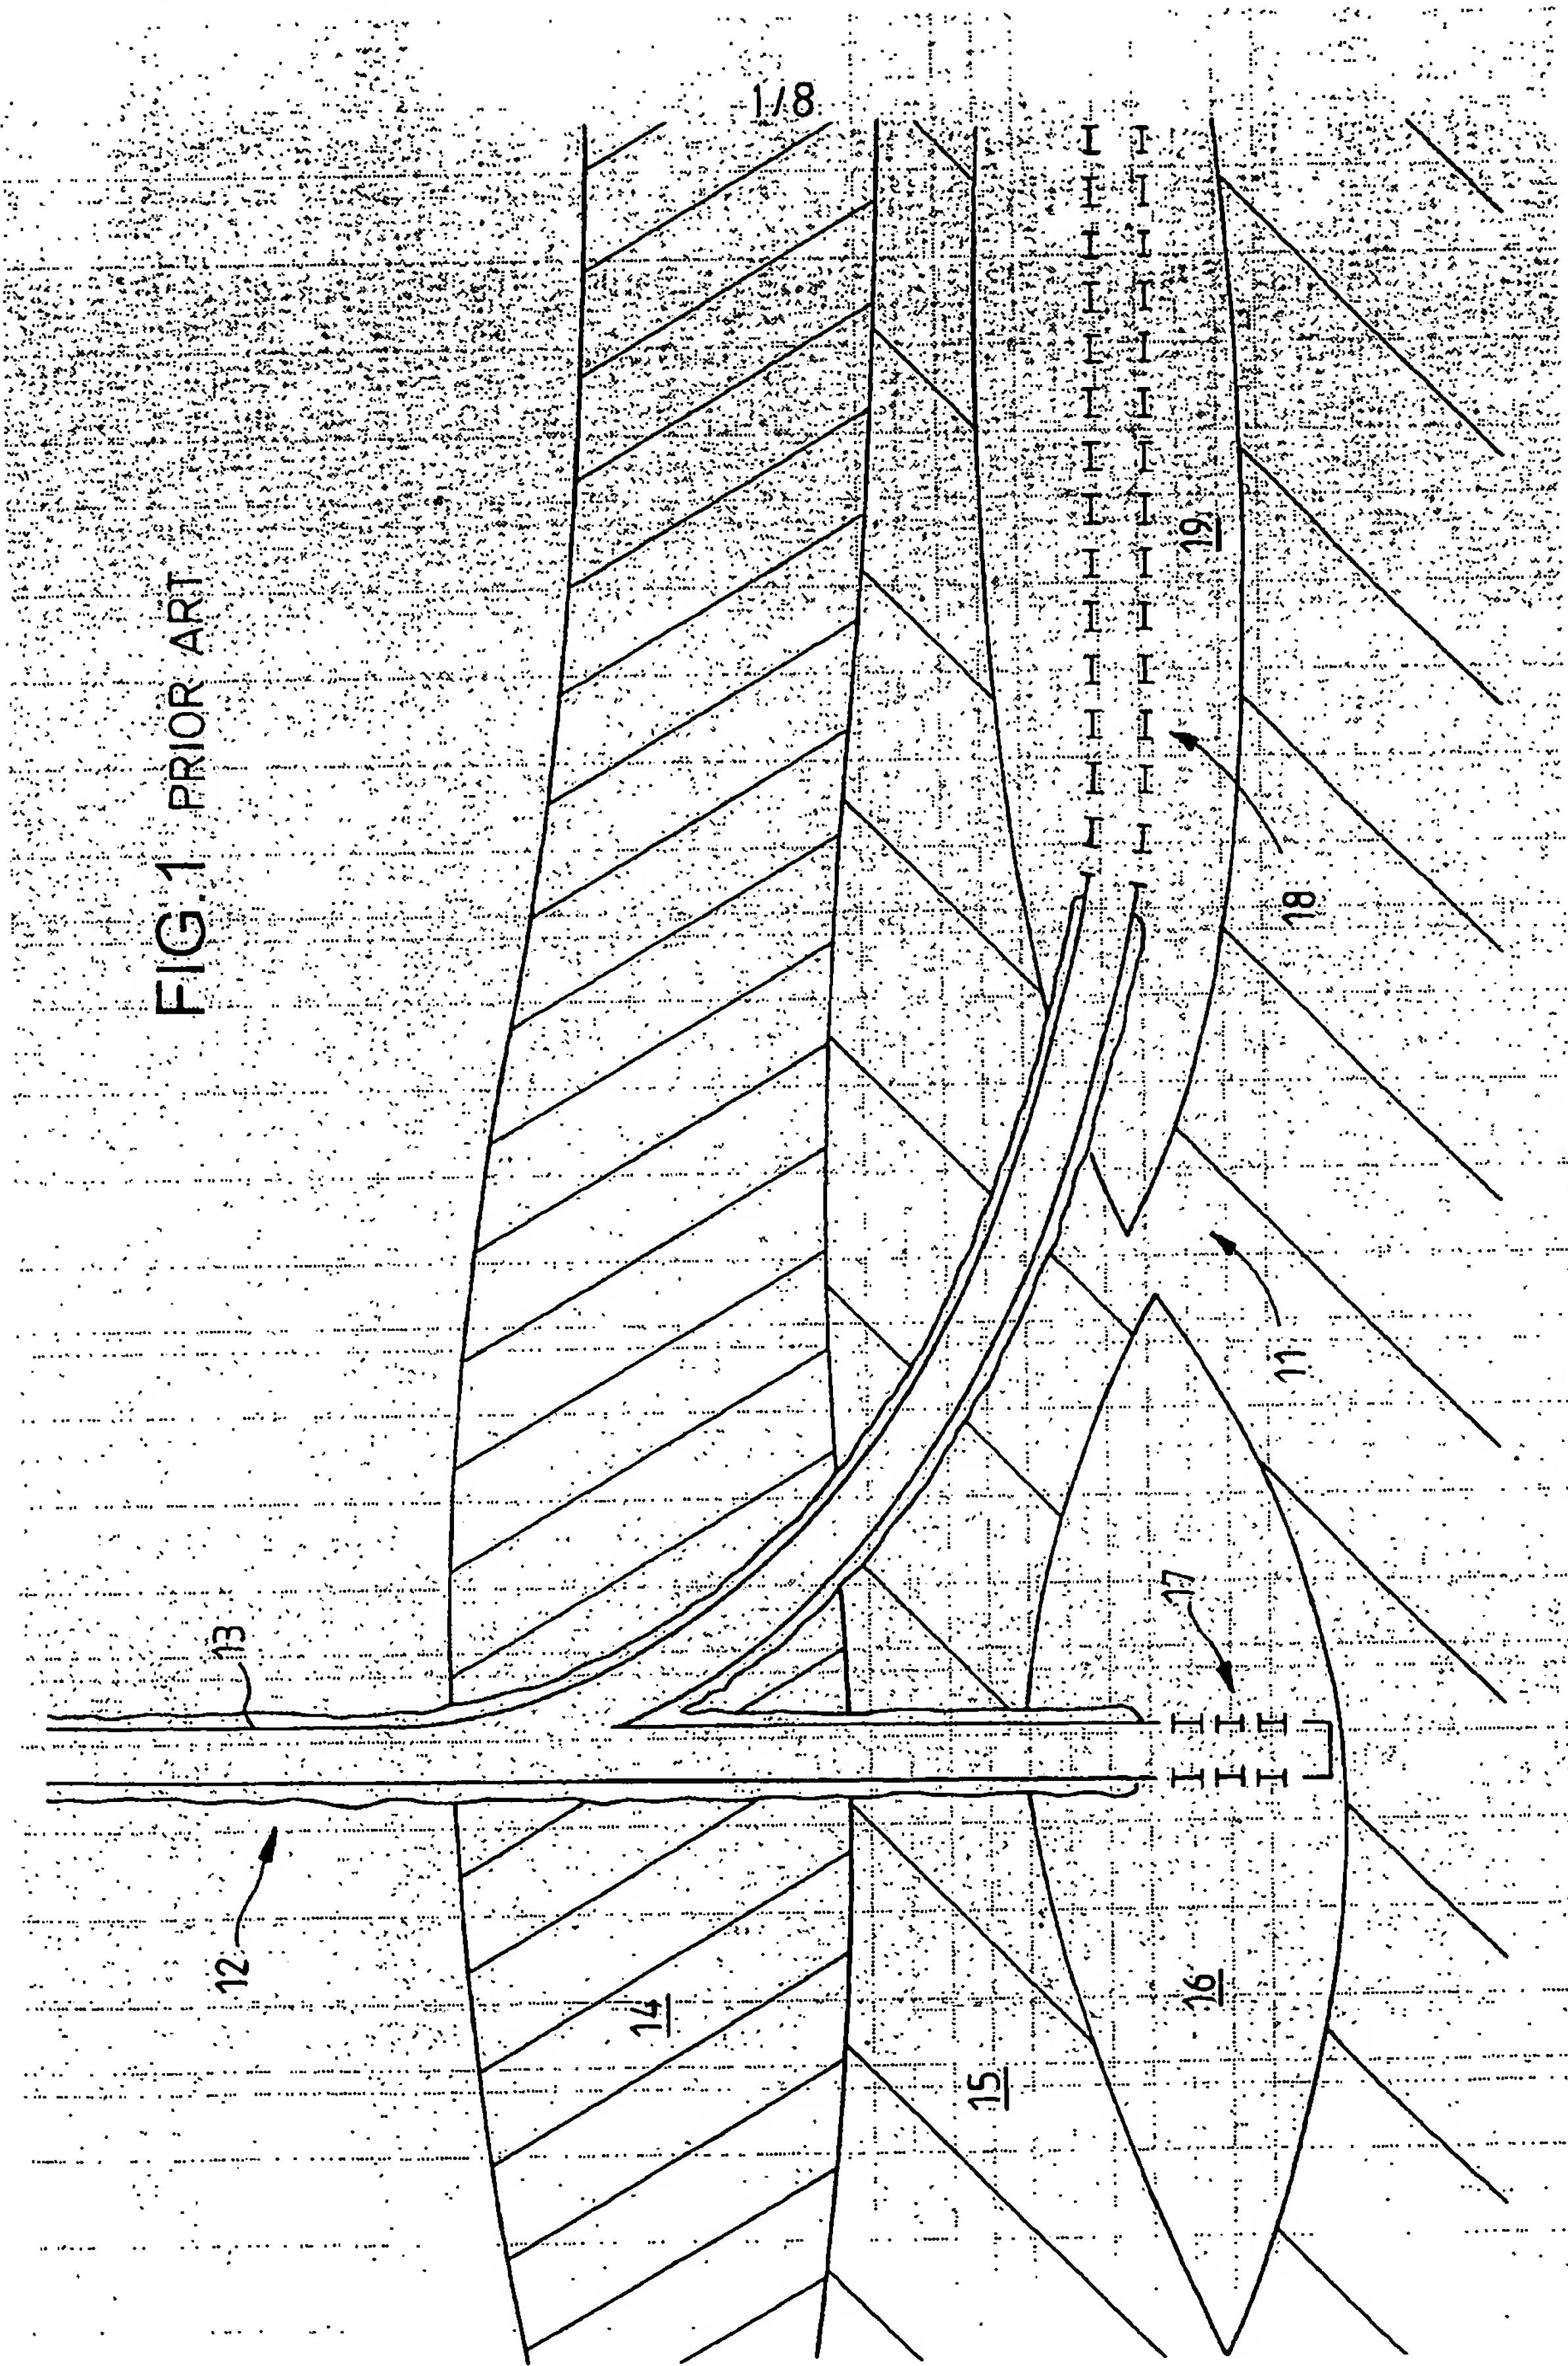

2/8

Position a drilling machine at a determined depth in a main well 21

Drill a lateral hole departing from a wall of the main well, in a direction of elongation forming a determined angle with the main well, using the drilling machine 22

Construct downhole a tubular for the lateral hole 23

Position the constructed tubular into the lateral hole 24

FIG.2

BEST AVAILABLE COP®

3/8

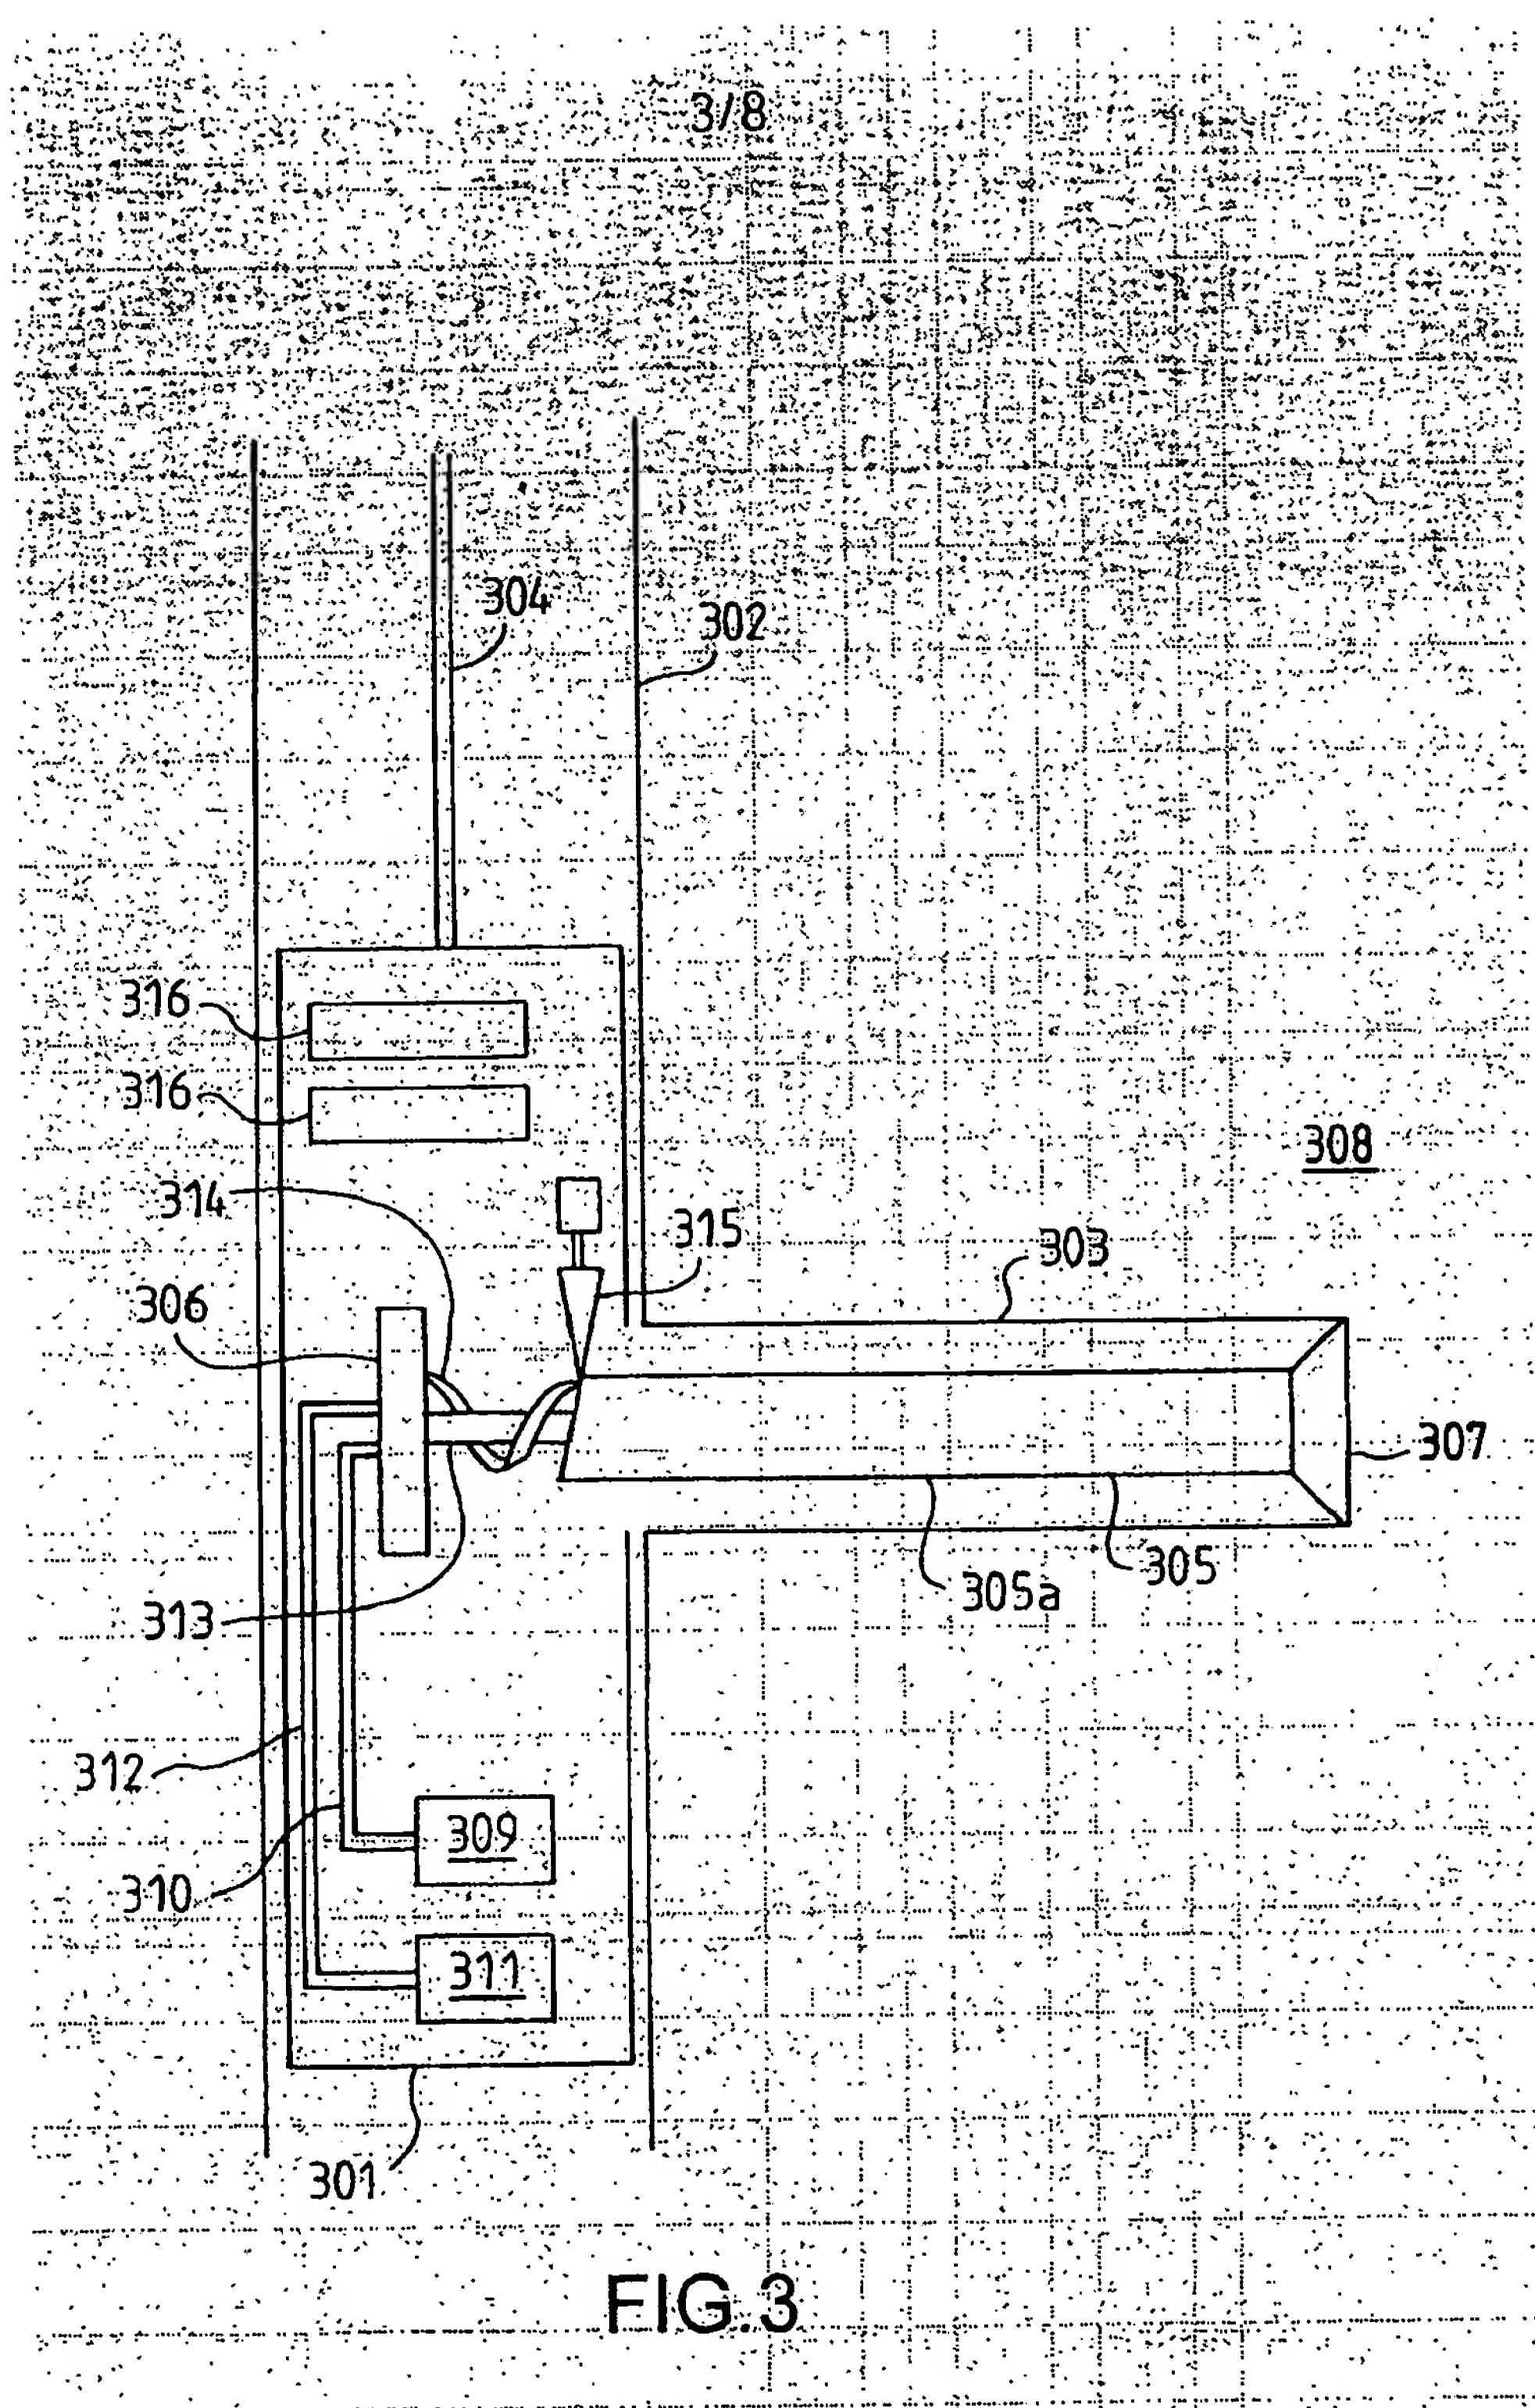


FIG. 3

BEST AVAILABLE COP^Y

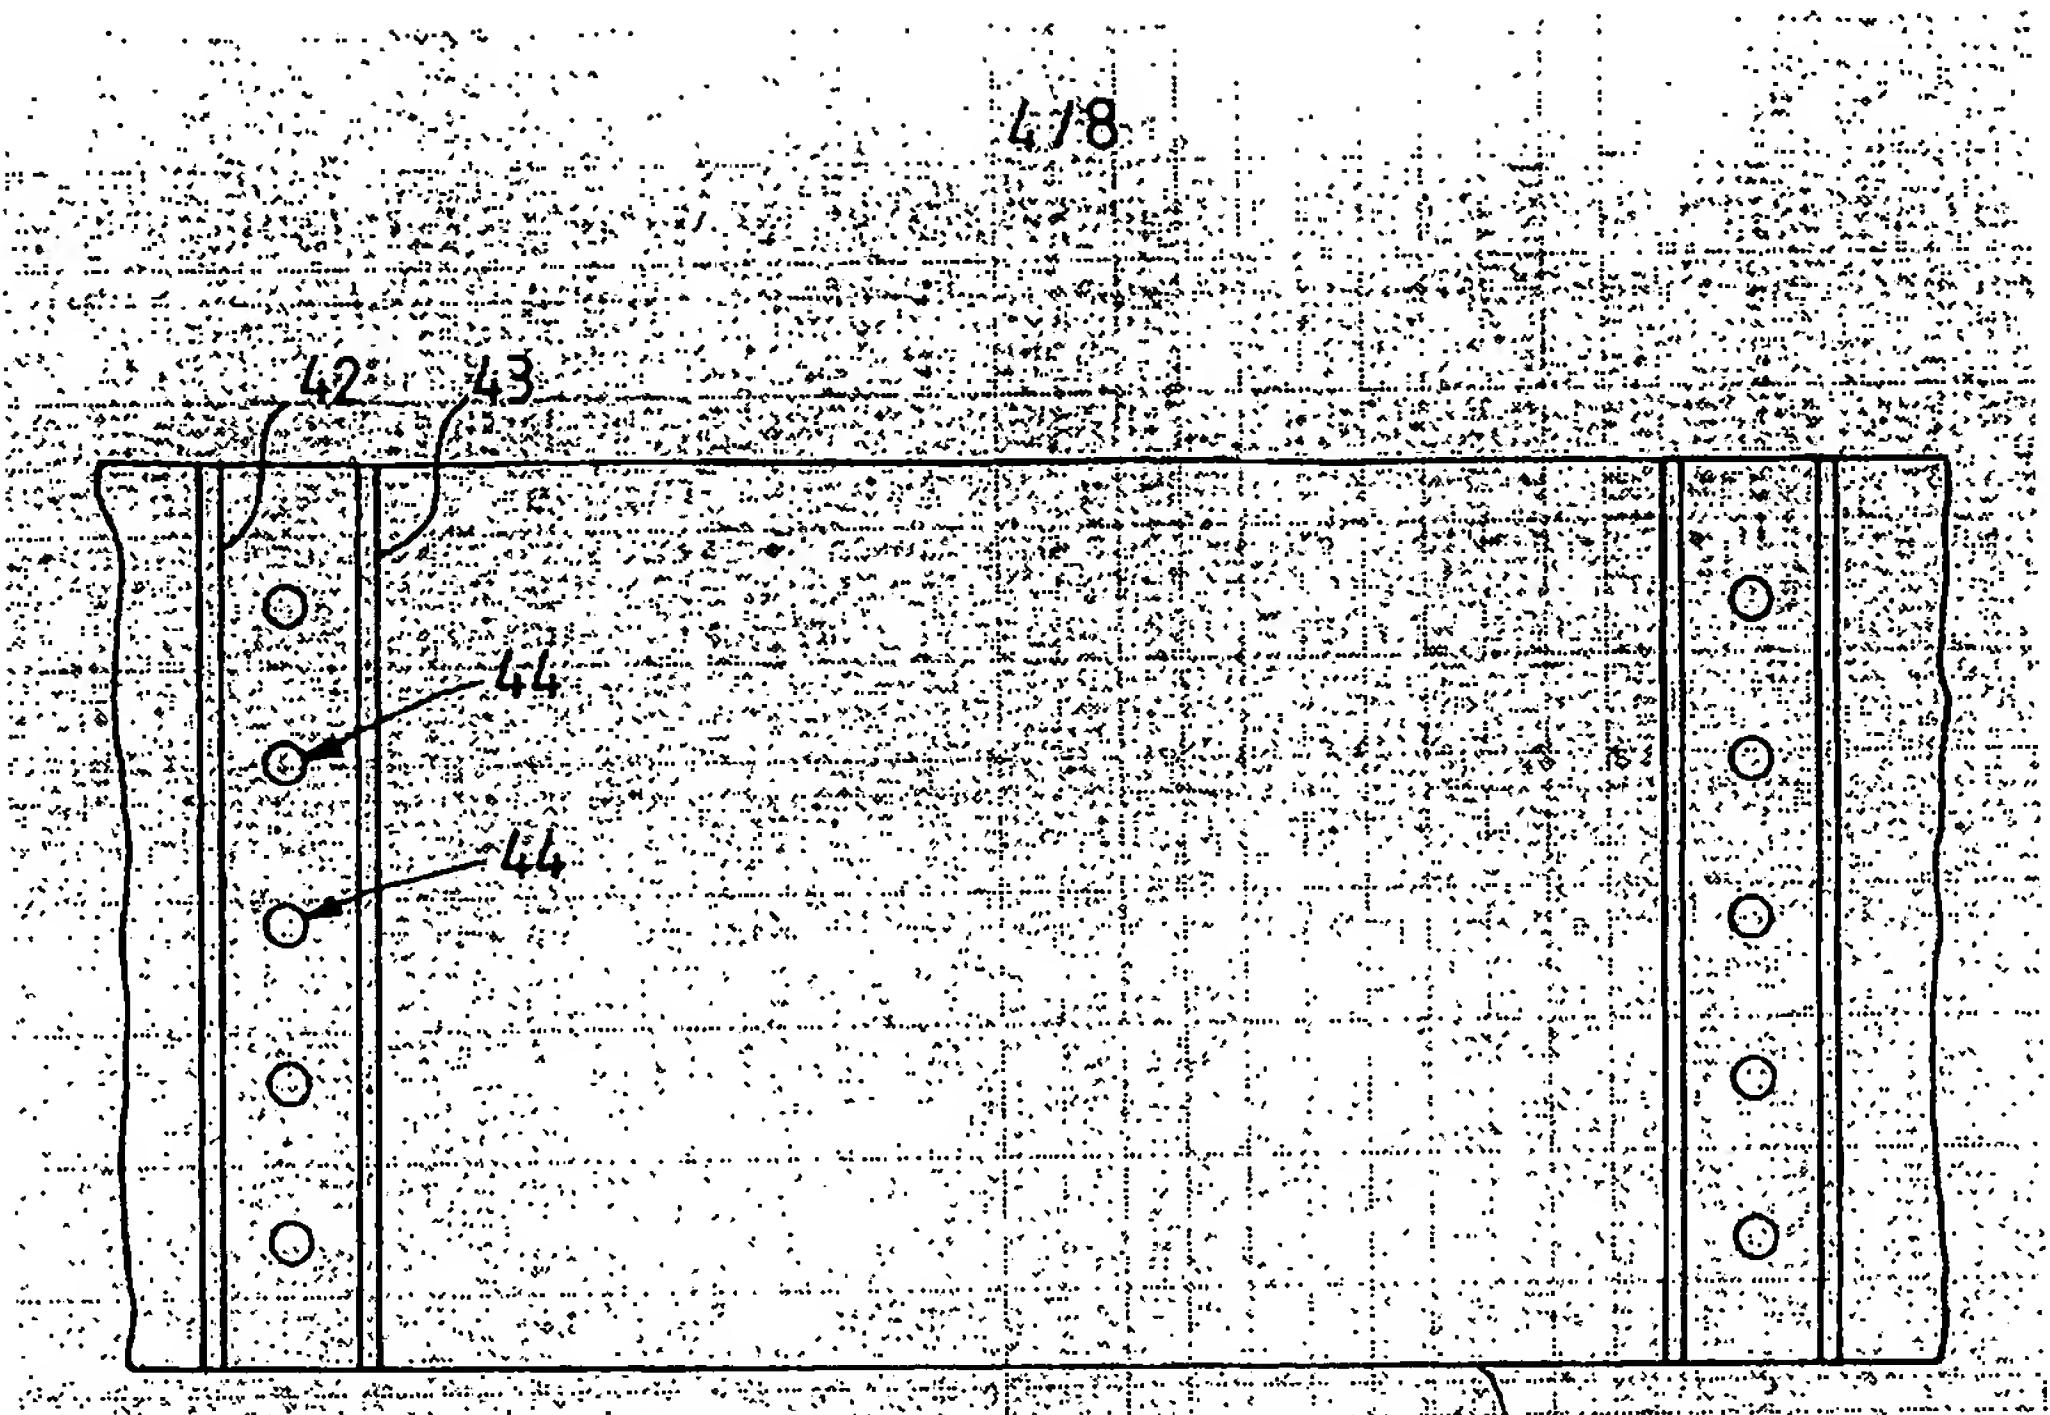


FIG.4

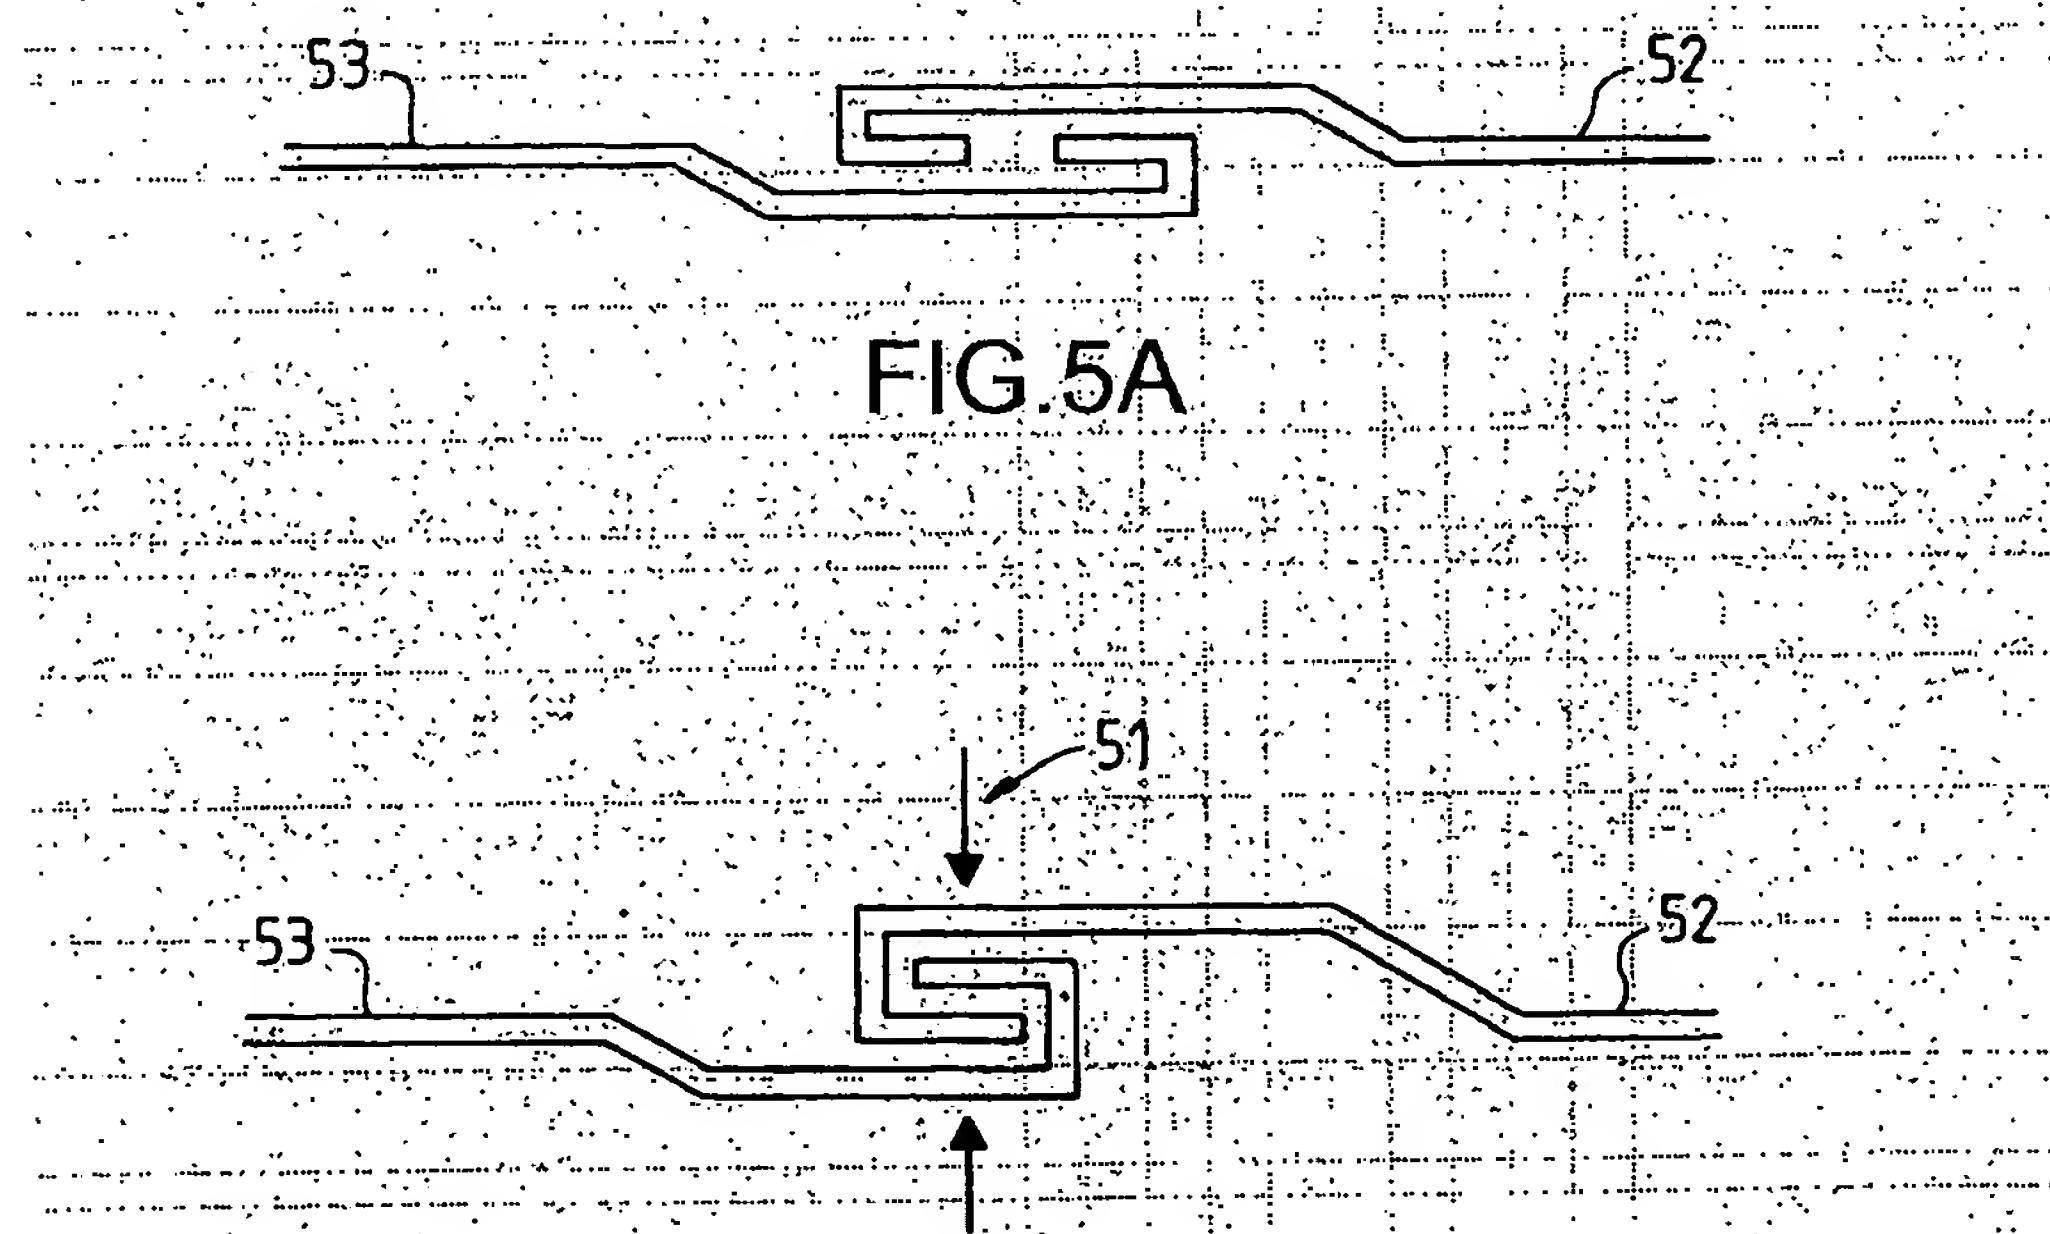


FIG.5A

FIG.5B
BEST AVAILABLE COP


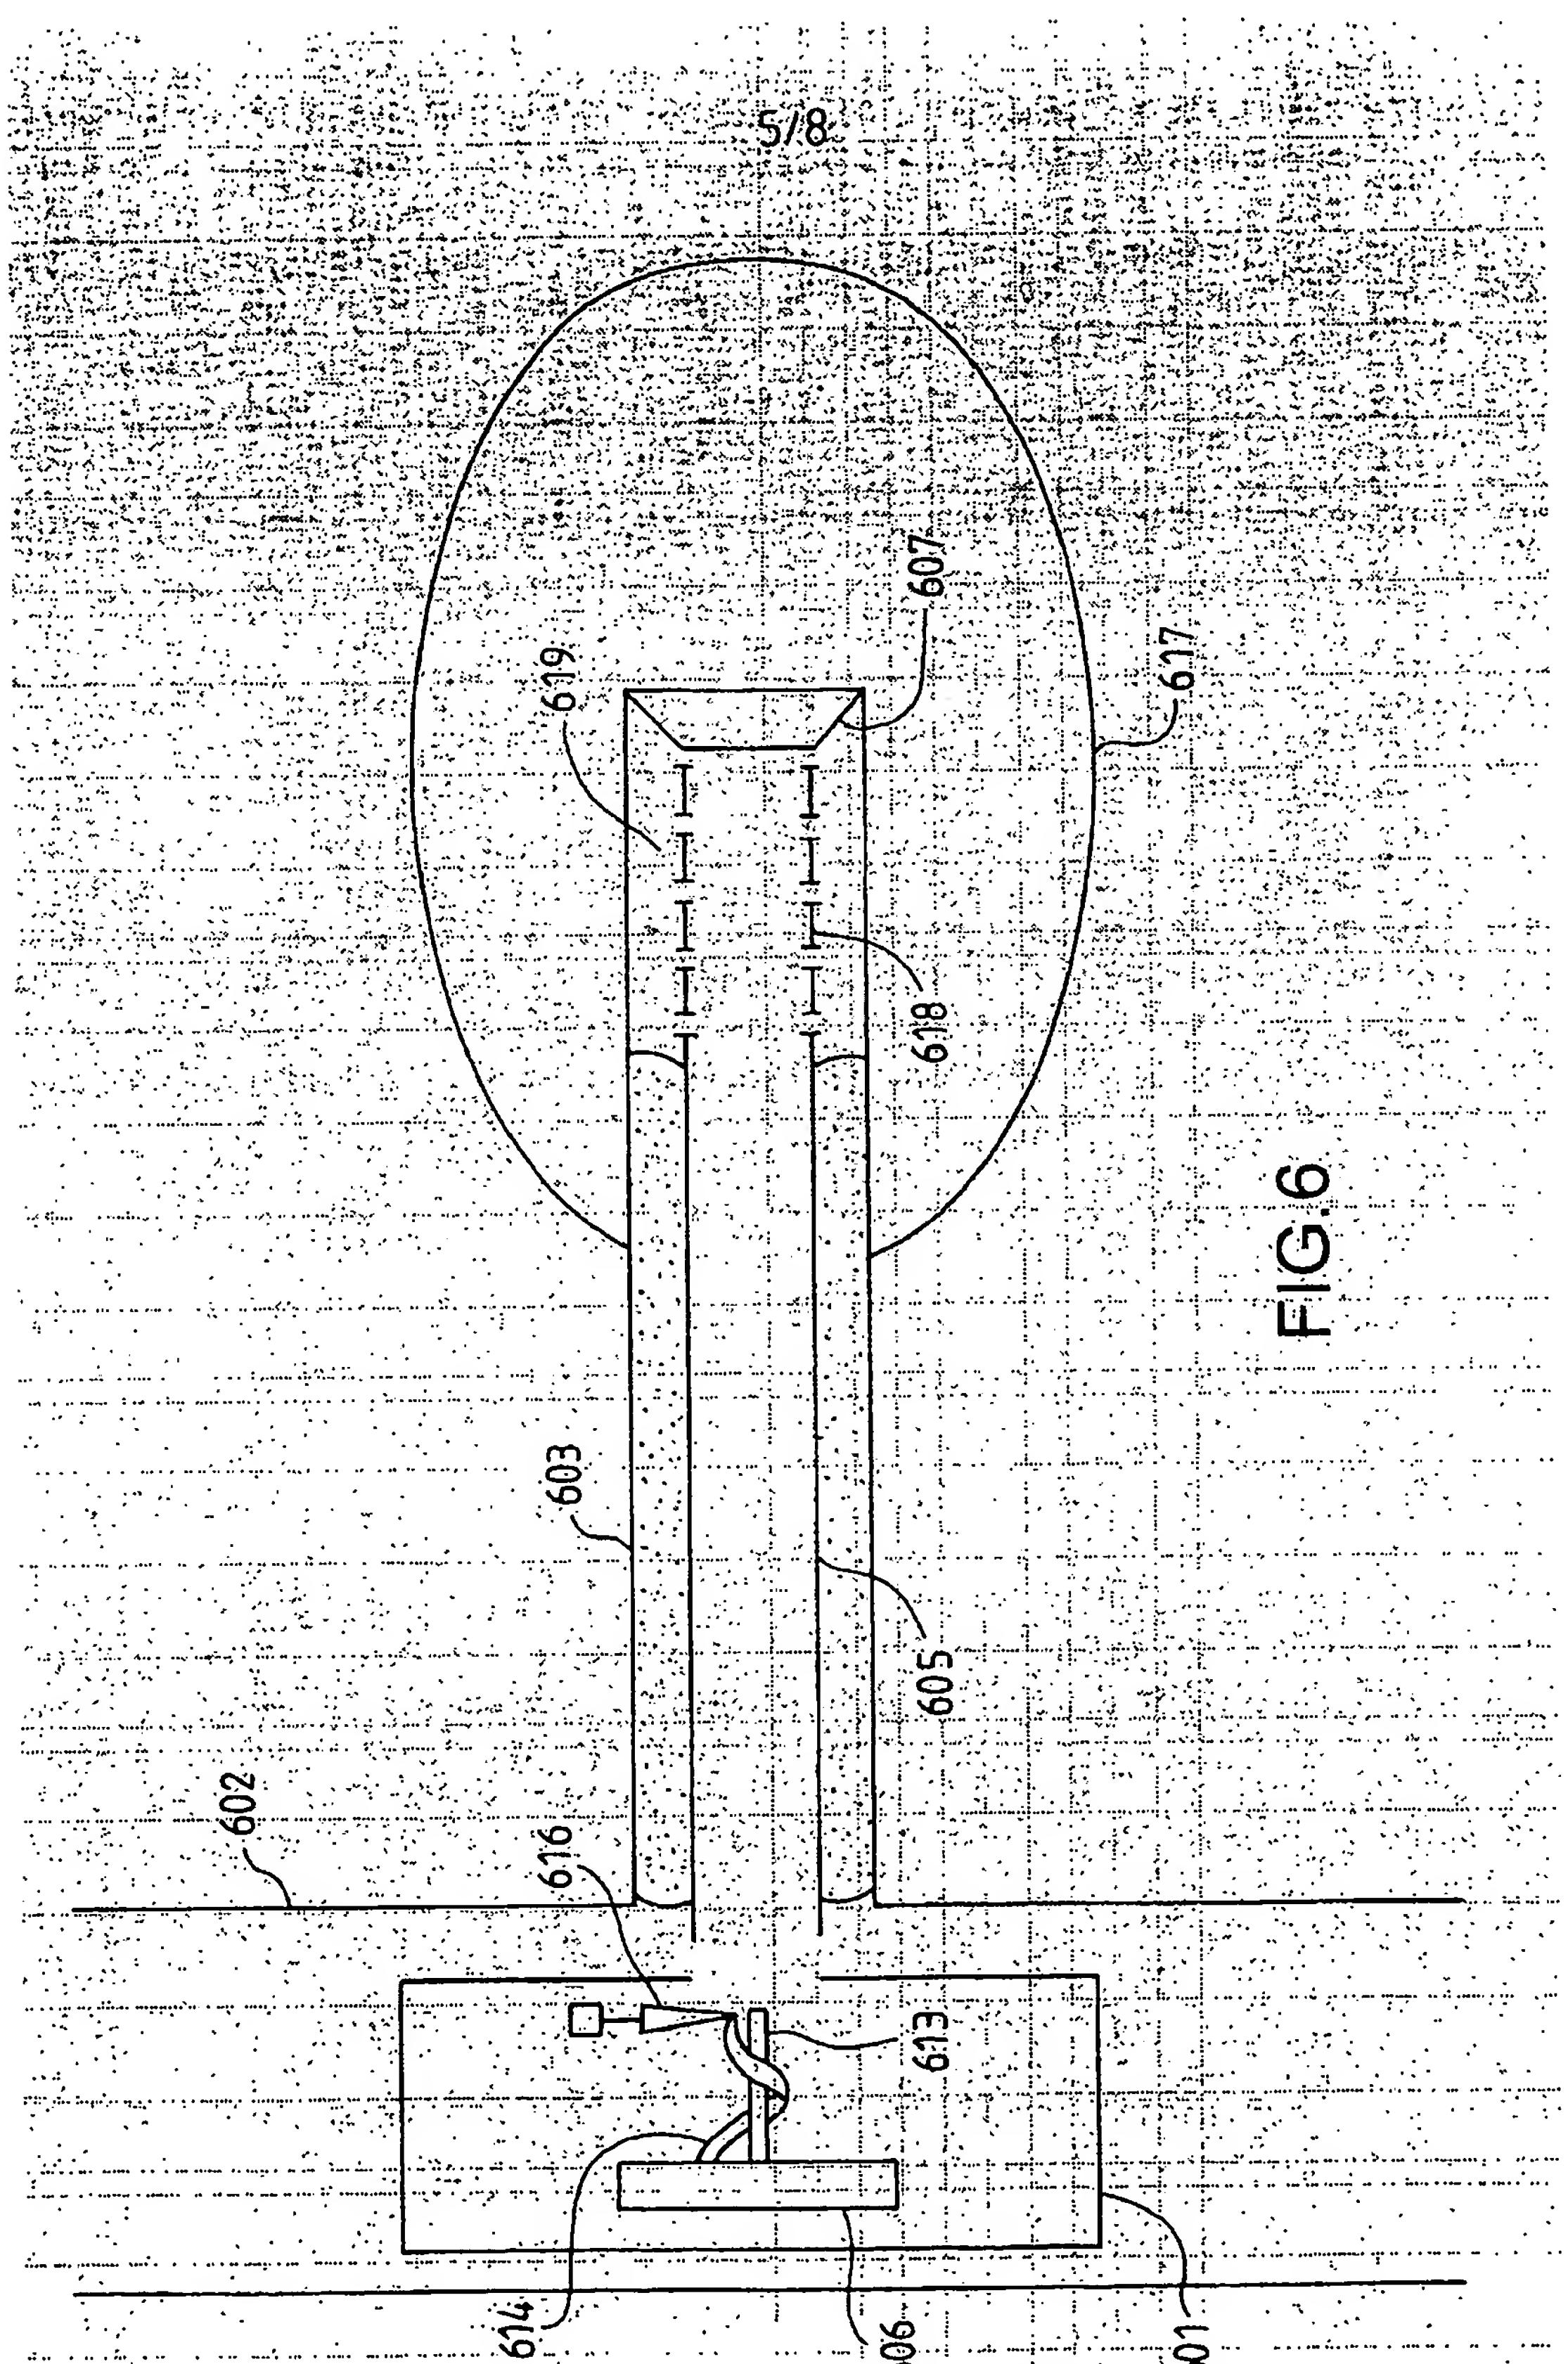


FIG. 6

BEST AVAILABLE COP'

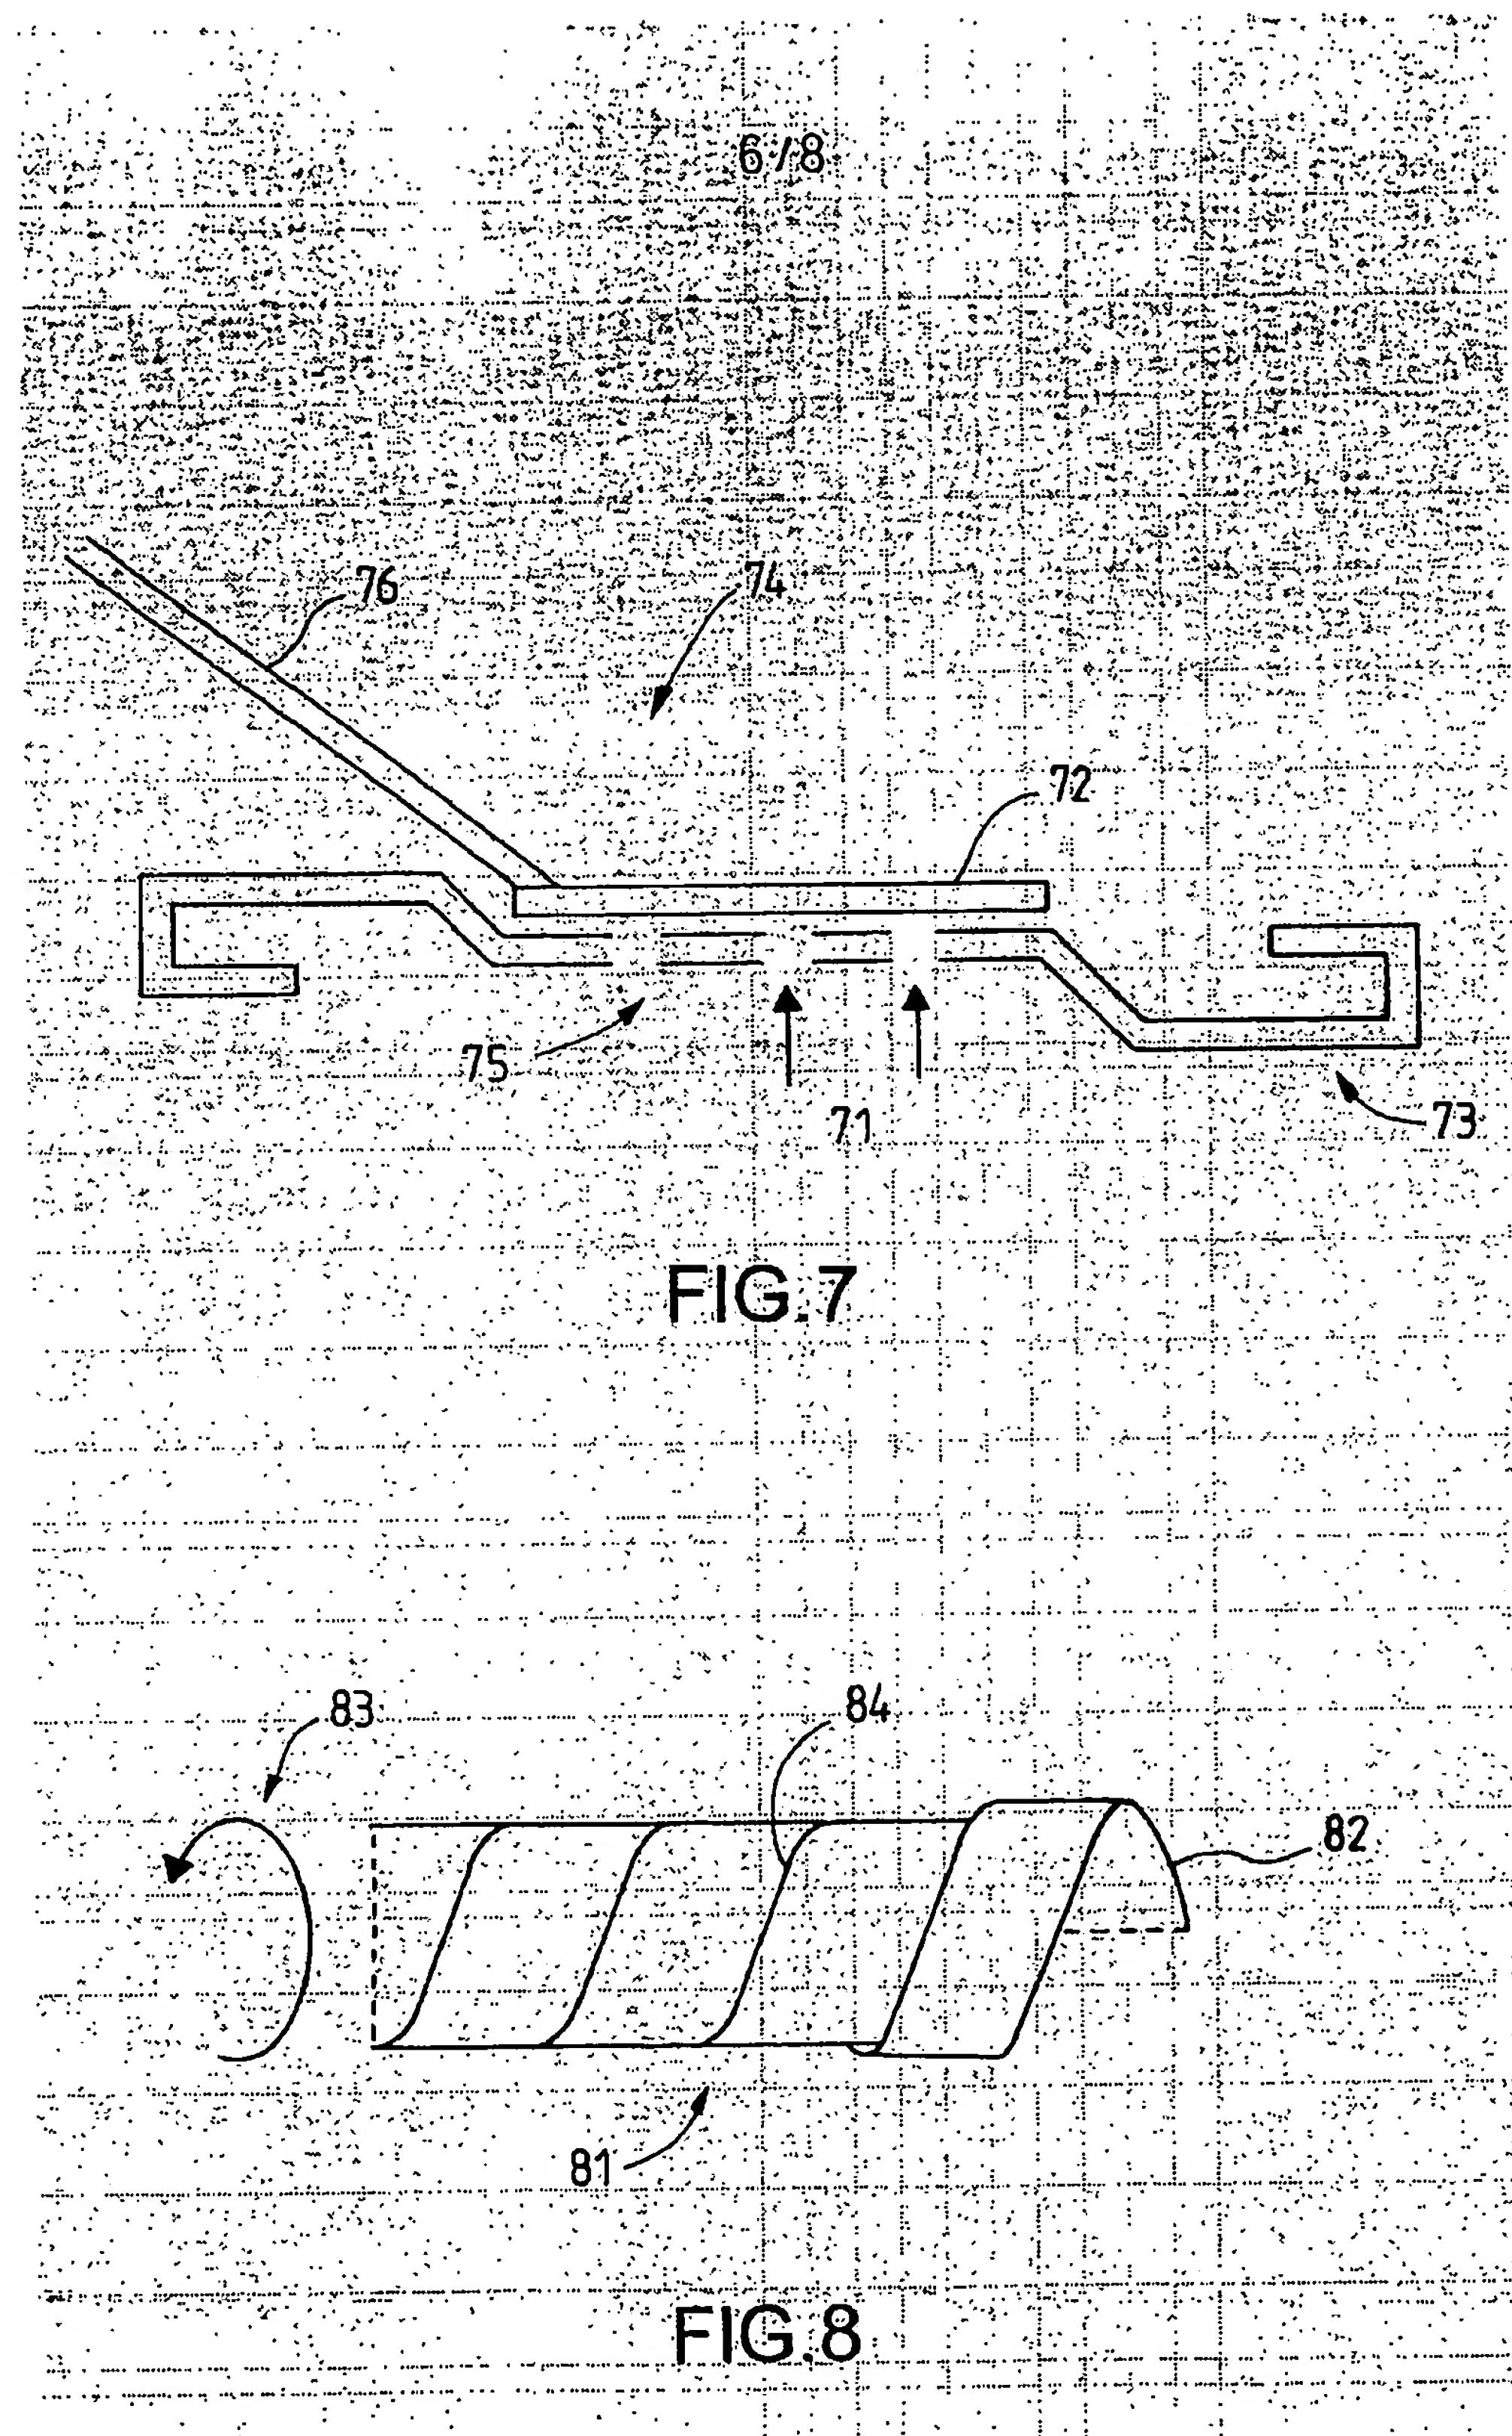

BEST AVAILABLE COP'